

KBVF

Hybrid AC Drive

A Digital Drive with Analog Interface IP-20 Enclosure

Primary Features

Horsepower 1/8 to 5 HP, Jumper Selectable
1Ø & 3Ø Input 115/230/460 VAC, 50/60 Hz
3Ø Output 230/460 VAC
200% Starting Torque
Power & Status Indicators

Benefits

Saves Time

Easy to Install and Simple to Operate
Does not require programming
or commissioning
Up and running in less than 10 minutes.

Motors Last Longer

Proprietary CL Software
*Provides overload protection,
prevents motor burnout
and eliminates nuisance tripping.
UL approved as electronic overload
protector for motors.*

Energy Saving

Uses only the power the application requires
*Energy savings is realized by using variable motor speed
vs. constant speed motors.*

Economical to Use

Combines Soft Start with Variable Speed
Adjustable Soft Start.

KB Customization for OEM's

"You get exactly what you need. Nothing more, Nothing less."
*Includes: preset calibration, installing drive options and custom software.
Ready to use out of the box.*

GFCI software* allows equipment to operate with Ground Fault Circuit Interruption circuit breakers or outlets.

**With factory programming.*



KB Electronics, Inc.

Automation and Control

Additional Features

Sensorless Flux Vector Control

Flux Vector Compensation with Static Auto-Tune provides excellent speed regulation with high torque loads throughout the entire speed range. Auto energy saving at light loads. Smooth motor torque.

Electronic Inrush Current Limit (EICL™) Protection

Eliminates harmful inrush AC line current during power up.

Ride-Through

Provides smooth recovery to the previous set speed during a momentary power loss.

Holding Torque at Zero Speed

Resists motor shaft rotation when the drive is in "Stop" mode.

Regeneration Protection

Eliminates tripping due to high bus voltage caused by rapid deceleration of high inertial loads.

Undervoltage and Overvoltage Protection

Shuts down the drive if the AC line input voltage goes above or below the operating range.

Short Circuit Protection

Shuts down the drive if a short circuit occurs at the motor (phase-to-phase).

Basic, Programmable, Trimpot Adjustments

Min. Speed, Max. Speed, Accel, Decel, Current Limit, Slip Comp.

Drive Options

Drive-Link™ Programming Kit

Allows PC programming.

SIVFR Signal Isolator and Run Fault Relay*

Provides isolation between a non-isolated signal source and the drive.

DIVF Modbus Serial Communication Module

Class "A" or "B" (CE) RFI Filter

Installs on drive.

DBVF Dynamic Brake Module

Provides faster braking.

Multi-Speed Board

Provides up to four independently adjustable preset speeds.

KBRK Remote Digital Keypad

Allows remote operation and programming of drive**.

IOVF Input/Output Multi-Function Module

Adds up to 17 points of additional I/O.

*Standard on 460 VAC models.

** OEM applications only.

Learn about our BAD™ distributor program

www.kbelectronics.com/BAD.pdf



Applications

- Actuators • Air Cleaners • Amusement Rides
- Ball Pitching Machines • Blowers • Boat Lifts
- Bowling Alley Lane Cleaners • CNC • Conveyors
- Door and Gate Openers • Drilling • Duct Cleaners
- Dumbwaiters • Elevators and Hoists
- Exercise Equipment • Fabric Processing • Fans
- Feeders • Film Processing • Floor Cleaning
- Food Processing • Garment Cutting
- Grinding and Polishing • Hoppers • Horse Walkers
- HVAC • Indexers • Irrigation • Laminating
- Lift Station Pumps • Machine Tools
- Medical • Milling • Mixers • Oven Conveyors
- Packaging • Paint Blenders, Shakers, and Sprayers
- Paper Handling • Portable Equipment Used with GFCIs
- Pottery Wheels • Printing
- Pumps • Range Hoods • Sandblasting • Saws
- Sewing • Stretch Wrap • Textile • Treadmills
- Therapeutic Vibrators • Washing Machines
- Wave Soldering • Web Processing • Wheelchair Lifts
- Whole House Vacuums and Attic Fans
- Wire Feeders • Wood and Metal Lathes and Cutters
- Winders and Unwinders



KB Electronics, Inc.
kbelectronics.com • info@kbelectronics.com

Automation and Control

Ratings & Dimensions

115 VAC 1-Phase Input • 230 VAC 3-Phase Output

| Model No. | Part No. | Ratings | | Dimensions – Inches, (mm) | | | Net Weight | |
|-----------|----------|-------------|------|---------------------------|------------|------------|------------|-----|
| | | HP, (kW) | Amps | Width | Length | Height | Lbs. | kg |
| KBVF-13 | 9957 | 1/2, (0.37) | 2.4 | 3.9, (99) | 4.3, (109) | 2.75, (70) | 1.3 | 0.6 |
| KBVF-14 | 9977 | 1, (0.75) | 4.0 | 4.7, (119) | 4.3, (109) | 5, (127) | 2.2 | 1.0 |

230 VAC 1-Phase Input • 230 VAC 3-Phase Output

| Model No. | Part No. | Ratings | | Dimensions – Inches (mm) | | | Net Weight | |
|-----------|----------|-------------|------|--------------------------|------------|------------|------------|-----|
| | | HP, (kW) | Amps | Width | Length | Height | Lbs. | kg |
| KBVF-23 | 9958 | 1/2, (0.37) | 2.4 | 3.9, (99) | 4.3, (109) | 2.75, (70) | 1.3 | 0.6 |
| KBVF-24 | 9978 | 1, (0.75) | 4.0 | 4.7, (119) | 4.3, (109) | 5, (127) | 2.2 | 1.0 |

115/230 VAC 1-Phase Input • 230 VAC 3-Phase Output

| Model No. | Part No. | Ratings | | Dimensions – Inches, (mm) | | | Net Weight | |
|-----------|----------|--------------|------|---------------------------|------------|------------|------------|-----|
| | | HP, (kW) | Amps | Width | Length | Height | Lbs. | kg |
| KBVF-21D | 9581 | 1/10, (0.07) | 1.0 | 3.9, (99) | 4.3, (109) | 2, (51) | 0.7 | 0.3 |
| KBVF-22D | 9572 | 1/4, (0.18) | 1.5 | 3.9, (99) | 4.3, (109) | 2.75, (70) | 1.3 | 0.6 |
| KBVF-23D | 9959 | 1/2, (0.37) | 2.4 | 3.9, (99) | 4.3, (109) | 2.75, (70) | 1.3 | 0.6 |
| KBVF-24D | 9979 | 1, (0.75) | 4.0 | 4.7, (119) | 4.3, (109) | 5, (127) | 2.2 | 1.0 |
| KBVF-26D | 9496 | 1½, (1.13) | 5.5 | 4.7, (119) | 5.7, (145) | 4.5, (114) | 2.9 | 1.3 |



230 VAC 3-Phase Input • 230 VAC 3-Phase Output

| Model No. | Part No. | Ratings | | Dimensions – Inches, (mm) | | | Net Weight | |
|-----------|----------|-------------|------|---------------------------|------------|-------------|------------|-----|
| | | HP, (kW) | Amps | Width | Length | Height | Lbs. | kg |
| KBVF-23P | 9676 | 1/2, (0.37) | 2.4 | 3.9, (99) | 4.3, (109) | 2.75, (70) | 1.1 | 0.5 |
| KBVF-24P | 9677 | 1, (0.75) | 4.0 | 4.7, (119) | 4.3, (109) | 5, (127) | 2.0 | 0.9 |
| KBVF-27 | 9591 | 2, (1.5) | 6.7 | 4.7, (119) | 7.5, (191) | 4.45, (113) | 4.1 | 1.9 |
| KBVF-29 | 9593 | 3, (2.25) | 9.0 | 4.7, (119) | 7.5, (191) | 4.45, (113) | 4.6 | 2.1 |

460 VAC 3-Phase Input • 460 VAC 3-Phase Output*

| Model No. | Part No. | Ratings | | Dimensions – Inches (mm) | | | Net Weight | |
|-----------|----------|-----------|------|--------------------------|-------------|-------------|------------|-----|
| | | HP, (kW) | Amps | Width | Length | Height | Lbs. | kg |
| KBVF-42 | 9645 | 1, (0.75) | 2.0 | 4.1, (103) | 9.31, (236) | 2.75, (70) | 2.8 | 1.3 |
| KBVF-45 | 9590 | 3, (2.25) | 4.6 | 4.7, (119) | 8.75, (222) | 4.45, (113) | 4.1 | 1.9 |
| KBVF-48 | 9592 | 5, (3.75) | 8.3 | 4.7, (119) | 8.75, (222) | 4.45, (113) | 4.6 | 2.1 |

*Contains SIVFR signal input isolation and Run/Fault output relay.

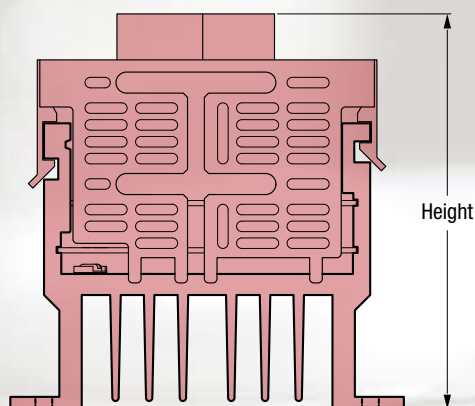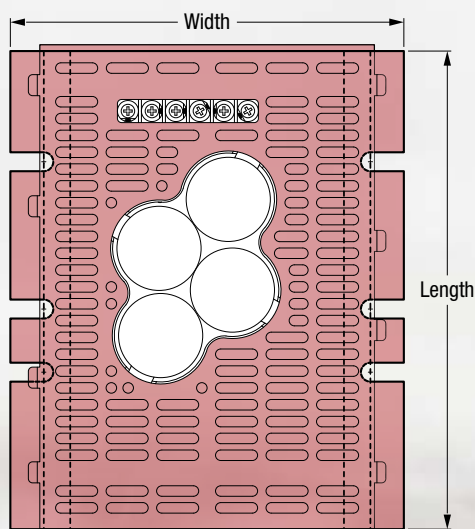

Specifications

| | |
|---|------------------------|
| Maximum Load (% of Current Overload for 2 Minutes) | 150 |
| Carrier, Switching Frequency (kHz) | 16, 8 |
| Output Frequency Resolution (Hz) | 0.06 |
| Minimum Output Frequency to Motor (Hz) | 0.3 |
| Acceleration Time (Seconds) | 0.3 – 20 |
| Deceleration Time (Seconds) | 0.3 – 20 |
| Speed Range (Ratio) | 60:1 |
| Speed Regulation (30:1 Speed Range, 0 – Full Load) (% Base Speed) | 2.5 |
| Stalled Motor Trip Time (Seconds) | 6 |
| Braking | DC Injection* |
| Operating Temperature Range (°C / °F) | 0 – 40 / 32 – 104 |
| Storage Temperature (°C / °F) | -25 – +85 / -13 – +185 |


*Requires factory programming, option for regenerative braking module is available.



Automation and Control

KB Electronics, Inc.
kbelectronics.com • info@kbelectronics.com

General Connection Diagram

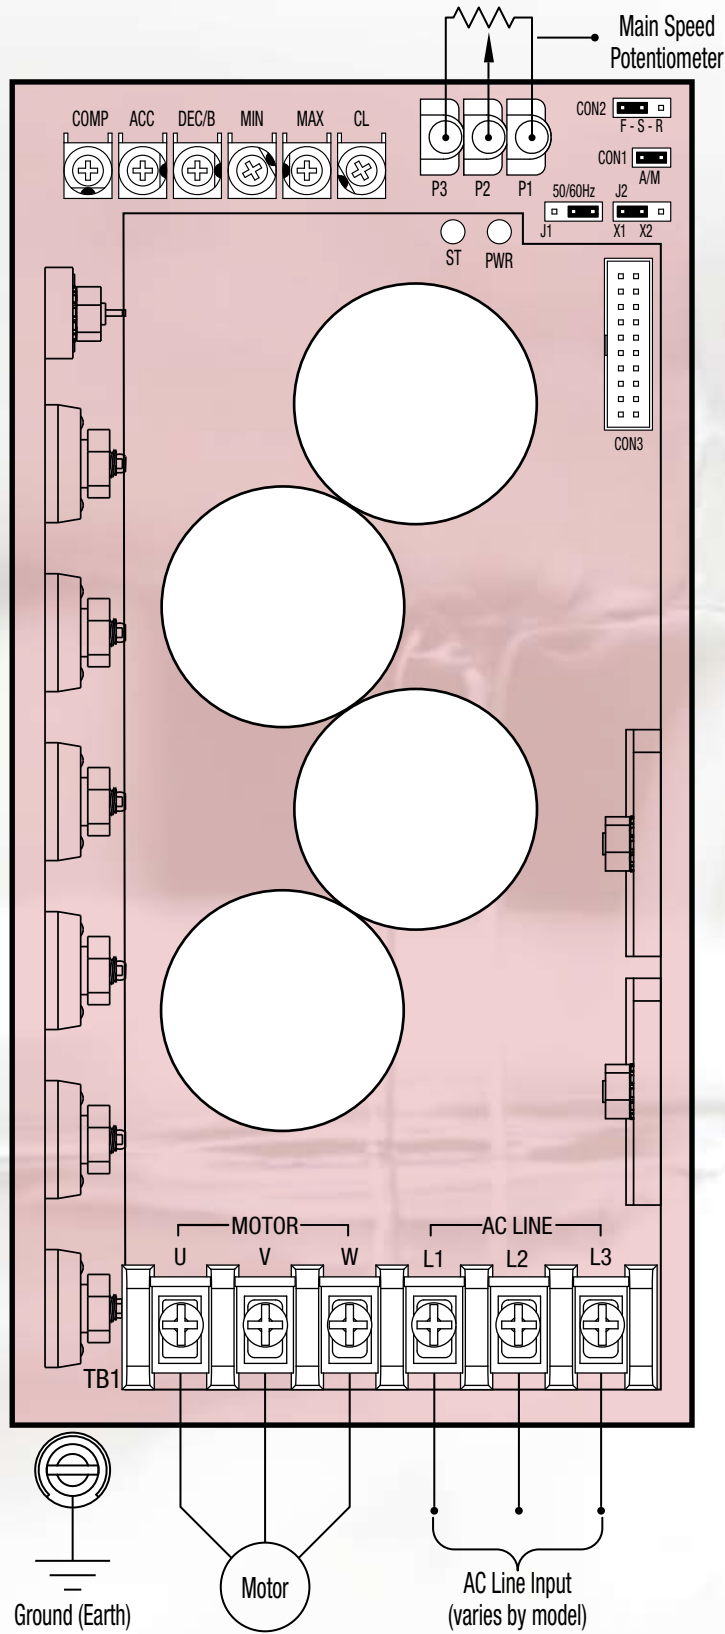

WA HEAD OFFICE

Unit 1 / 45 Inspiration Drive WA 6065
☎ (08) 9303 4966 📠 (08) 9303 4977
✉ info@chainanddrives.com.au

NSW HEAD OFFICE

Unit 7 / 70 Holbeche Road Arndell Park NSW 2148
☎ (02) 9674 8611 📠 (02) 9674 8363
✉ salesnsw@chainanddrives.com.au

www.chainanddrives.com.au