


**Mönninghoff**

# **Pneumatic tooth clutch**

## **Type 675**

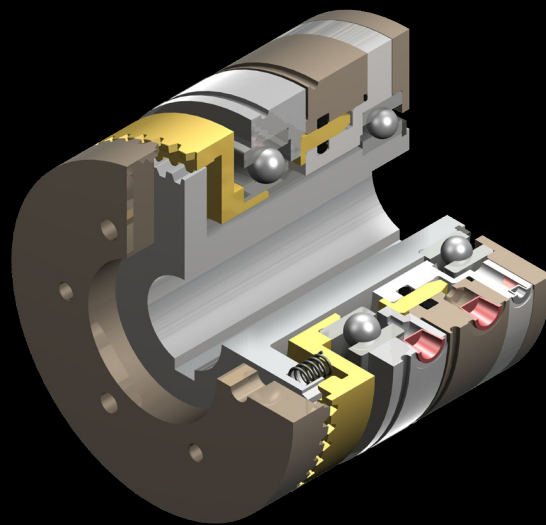

**CHAIN & DRIVES**  
COMPLETE BEARINGS  
& POWER TRANSMISSION

POWER > SPEED > TORQUE

## Pneumatic tooth clutch - Type 675

### Characteristics and features


- positive-locking transmission of torque without slip
- designs up to 2200 Nm possible
- no additional energy supply necessary
- oil running or dry running
- 1/8" ISO 228 thread compressed air connection point located on the outer envelope of the cylinder exterior
- engageable also at low relative speed
- high range of temperatures
- application-related customized tooth geometries
- synchronized switching with fixed engagement positions
- under certain circumstances available as torque limiter
- uncompromizing need for safety and reliability
- integrated, easy-to-assemble system solution
- condition monitoring on demand



Mönninghoff power transmission represents an infinite variant diversity that is applied by all areas of modern mechanical engineering.

Our technologies are mostly designed to operate under extreme conditions. We offer high precision products for medical robotics, fail-proof security for aerospace technology or synchronization solutions for the packaging or printing industry.


We thus address customers who have the highest standards for their own machines or systems. To them, we can offer highly complex, application-specific solutions.

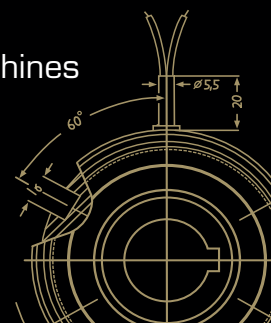

## Pneumatic tooth clutch - Type 675

### Match code

Mönninghoff pneumatic tooth clutches are indicated by the following match code:

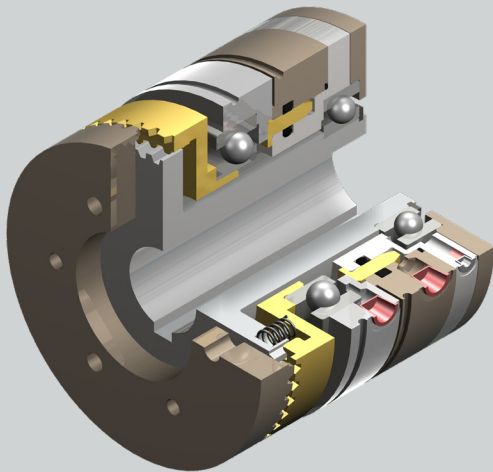

### 675 . A . B . C

- A** clutch size
- B** design
- C** indicator plate

Other individual characteristics:

- tothing geometries
- bore size with keyway


According to these characteristics, we design individual solutions concerning transmitted torque, engaging behavior or rotation speed.

Our engineers can assist with finding an application-specific clutch at any time. Together, we can develop individual and innovative solutions for extreme operating conditions.

### Ordering example

Mönninghoff pneumatic tooth clutch  
Type 675.21.1.4

Tothing	standard
Bore size d	30 mm H7, keyway acc to. DIN 6885/1

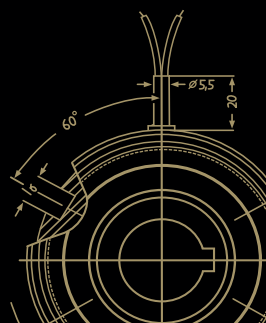

## Pneumatic tooth clutch - Type 675

### Clutch size

When dimensioning a Mönninghoff pneumatic tooth clutch, several technical preconditions should be considered:


- for the selection of the correct size, not only the peak load but also the dynamic behavior of the drive have to be taken into account
- tooth clutches - contrary to friction clutches - must never be overloaded and safety factors must be considered
- generally, the selection of the correct clutch is based on torque:

$$M = 9550 \frac{P}{n} \cdot K \text{ [Nm]}$$

$$M = (M_L + M_B) \cdot K \text{ [Nm]}$$

- the transmittable torque of the clutch must always be higher than the largest possible occurring torque:



$$\text{Requirement } M_{\ddot{U}} > M$$

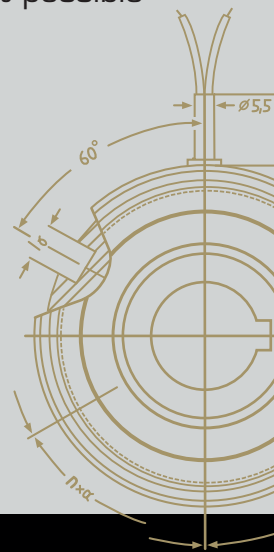

- $P$  = power of motor [kW]  
 $n$  = rotating speed [ $\text{min}^{-1}$ ]  
 $K$  = safety factor 1,5 ... 2,5  
 $M$  = required torque  
 $M_L$  = load torque  
 $M_B$  = acceleration torque  
 $M_{\ddot{U}}$  = nominal torque of clutch (see enclosed chart)

## Pneumatik tooth clutch - Type 675


### Design 1 & 2 - flange mounted

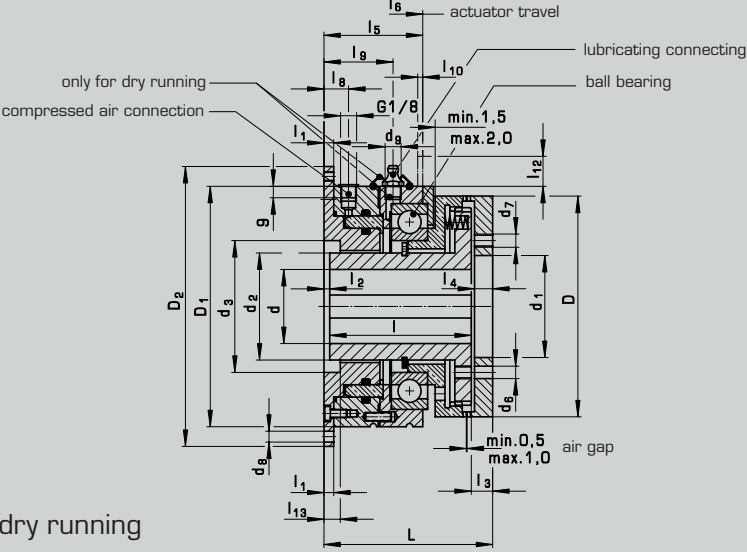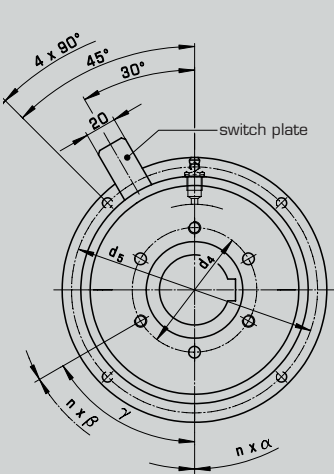

Type 675, design 1/2: oil running / dry running



### Technical data for flange mounted types

Size		21	23	25	31	32	
torque	[Nm]	100	250	500	1000	2200	
max. speed	[min <sup>-1</sup> ]	3000	3000	2500	2500	2000	
operating pressure	min. [bar]	4,5	5	5	5	5	
axial force	engaged [N]	645	1210	1880	2900	5410	
inertia	hub	2,7	6,7	16	39,7	80,4	
	toothed ring	1,1	2,5	6,5	16,4	38	
weight	[kg]	5,5	11	14	24	36	
min. bore	keyway acc. to DIN 6885/1 d H7	20	25	30	40	45	
max. bore		35	45	55	70	85	
dimensions	D	[mm]	114	134	166	204	235
	D <sub>1</sub>	115	146	162	204	235	
	D <sub>2</sub>	140	170	186	234	265	
	d <sub>1</sub> H7	52	62	72	90	100	
	d <sub>2</sub>	48	65	75	90	107	
	d <sub>3</sub> H7	62	80	90	110	130	
	d <sub>4</sub>	70	80	95	120	130	
	d <sub>5</sub>	128	158	174	220	250	
	for locating pin	d <sub>6</sub>	5,5	7,5	9,5	9,5	11,5
		n x α	3 x 120°	3 x 120°	3 x 120°	3 x 120°	3 x 120°
		d <sub>7</sub>	M8	M8	M12	M12	M12
		n x β	3 x 120°	3 x 120°	3 x 120°	6 x 60	6 x 60
		γ	60°	60°	60°	30°	30°
		d <sub>8</sub>	6,6	6,6	6,6	9	9
	d <sub>9</sub>	M 10 x 1	M 10 x 1	M 10 x 1	M 10 x 1	M 10 x 1	
	L <sup>+0,5</sup>	93	102,5	114	127	143	
	l <sub>-0,1</sub>	77	86	94	105	118	
	l <sub>1</sub>	6	6	7	7	7	
	l <sub>2</sub> <sup>+0,3</sup>	3	3,5	4	4	4	
	l <sub>3</sub> <sup>+0,2</sup>	13	13	16	18	21	
	l <sub>4</sub>	11	11	13	15	16	
disengaged	l <sub>5</sub>	53	60	65	71	82	
actuator travel	min.	l <sub>5</sub>	1,4	1,5	1,8	2,1	2,4
	max.	l <sub>5</sub>	1,9	2,0	2,3	2,6	2,9
	l <sub>6</sub>	15	15	16	16	16	
disengaged	l <sub>9</sub>	38	42	44	46	51	
	l <sub>10</sub>	3	3	4	4	4	
	l <sub>12</sub>	25,5	31	28	29	30	
	l <sub>13</sub>	9	10	11,5	12	12,5	

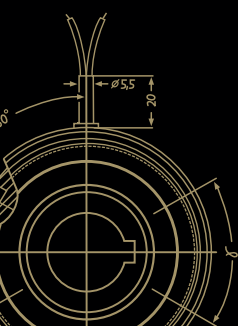

## Pneumatik tooth clutch - Type 675


### Design 3 & 4 - bearing mounted

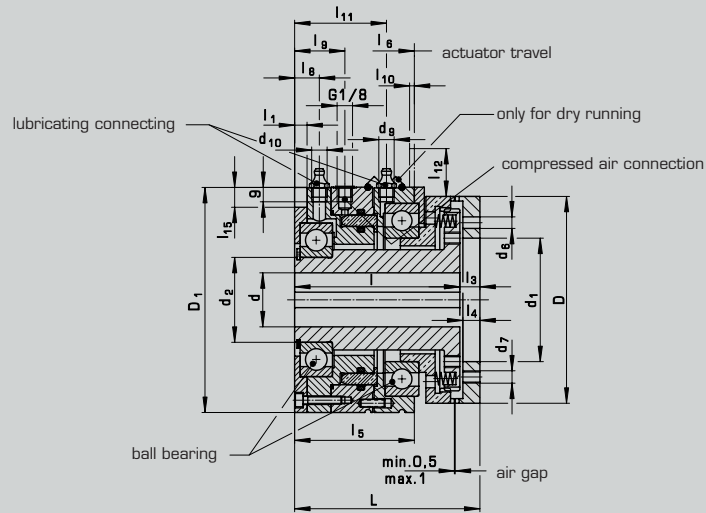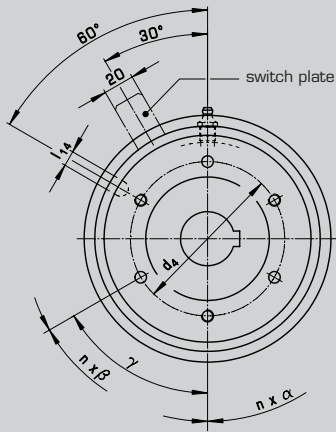

Type 675, design 3/4: oil running / dry running

### Technical data for bearing mounted types

Size		21	23	25	31	32	
torque	[Nm]	100	250	500	1000	2200	
max. speed	[min <sup>-1</sup> ]	3000	3000	2500	2500	2000	
operating pressure	min. [bar]	4,5	5	5	5	5	
axial force	engaged [N]	645	1210	1880	2900	5410	
inertia	hub	2,8	7,0	17,1	42,2	93,6	
	toothed ring	1,1	2,5	6,5	16,4	38	
weight	[kg]	6	12	18	28	48	
min. bore	keyway acc. to DIN 6885/1 d H7	20	25	30	40	45	
max. bore		32	42	55	70	85	
dimensions	D	114	134	166	204	235	
	D <sub>1</sub>	115	146	162	204	235	
	d <sub>1</sub> H7	52	62	72	90	100	
	d <sub>2</sub>	45	55	70	90	110	
	d <sub>4</sub>	70	80	95	120	150	
	d <sub>5</sub>	5,5	7,5	9,5	9,5	11,5	
	for locating pin	n x α	3 x 120°	3 x 120°	3 x 120°	3 x 120°	3 x 120°
	d <sub>7</sub>	M8	M8	M12	M12	M12	
	n x β	3 x 120°	3 x 120°	3 x 120°	6 x 60°	6 x 60°	
	γ	60°	60°	60°	30°	30°	
	d <sub>9</sub>	M10 x 1	M10 x 1	M10 x 1	M10 x 1	M10 x 1	
	d <sub>10</sub>	M6	M10 x 1	M10 x 1	M10 x 1	M10 x 1	
	L <sup>+0,5</sup>	104	120	140	147	188	
	l <sup>-0,1</sup>	91	107	124	129	167	
	l <sub>1</sub>	7	8	9	9	11	
l <sub>3</sub> <sup>+0,5</sup>	13	13	16	18	21		
l <sub>4</sub>	11	11	13	15	16		
disengaged	l <sub>5</sub>	64	77,5	91	91	127	
actuator travel	min.	1,4	1,5	1,8	2,1	2,4	
	max.	1,9	2,0	2,3	2,6	2,9	
disengaged	l <sub>8</sub>	12	16	26	18	43,5	
	l <sub>9</sub>	26	32,5	42	36	61	
	l <sub>10</sub>	3	3	4	4	4	
	l <sub>11</sub>	49	59,5	70	66	96	
disengaged	l <sub>12</sub>	25,5	31	28	29	30	
	l <sub>14</sub>	10	10	10	12	12	
	l <sub>15</sub>	6	8	8	10	10	

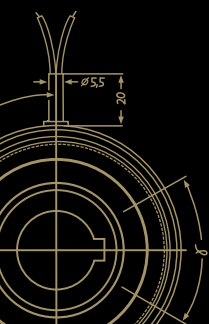

## Pneumatic tooth clutch - Type 675

### Engagement plate

If in the the event of an overload the axial component from the torque is larger than the compressive force (spring force), the engaging ring will slip out of mesh. An engagement plate fitted to the clutch operates a no-contact switch (proximity switch) and switches the clutch off without any residual torque.

### Compressed air feed

- nominal pressure between 4 and 5 bar
- the 1/8" ISO 228 thread compressed-air connection point is located on the outer envelope of the cylinder exterior and protected by a factory-fitted plug



### Compressed air treatment

- treated compressed air with solid particle size of max. 40 µm
- to the standard ISO 8573-1 Class 5
- water and oil content must meet the same standard

### Toothing geometries

Mönninghoff clutches offer a large variety of application-specific designs of toothing.

The amount of possible geometries or fixed points is endless and our engineers can help to design an optimized version at any time.

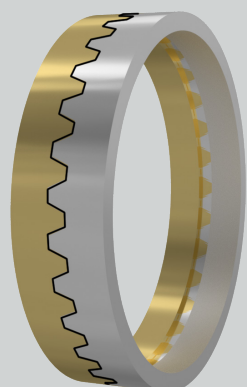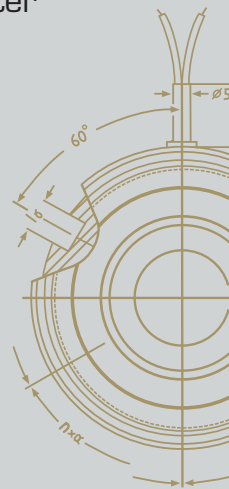

#### Standard

- transmits torque in both directions with little backlash
- also available backlash free
- with increased flank angle also available as torque limiter with fixed position engagement



#### Saw (counter-) clockwise


- transmits nominal torque in both directions
- in reverse direction approx. 10% of torque can be transmitted
- can be engaged at higher speeds

## Pneumatic tooth clutch - Type 675

### Switching characteristics

They can be used in oil or dry operation without any major changes in the engagement properties provided there are oils available with a maximum viscosity of  $25 \times 10^{-6} \text{m}^2/\text{s}$  at  $50^\circ\text{C}$ .

### At a glance

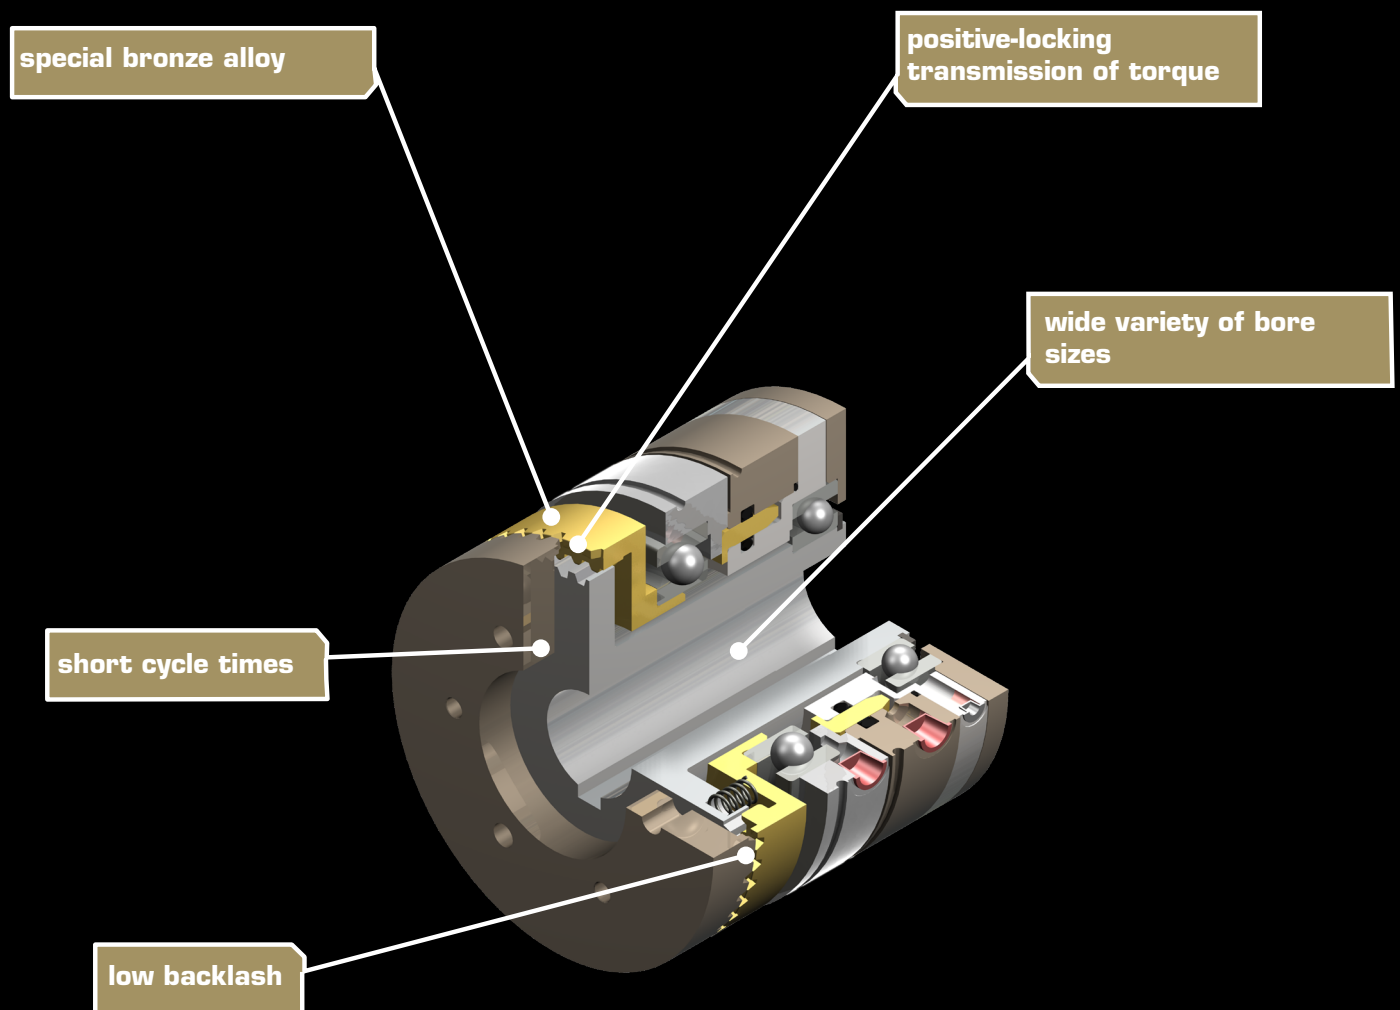





## System solutions

### You need more?


Mönninghoff clutches can be combined with a variety of many other power transmission elements. Such complex high-tech systems can solve any application-specific tasks and can fulfill any customer-specific wishes.

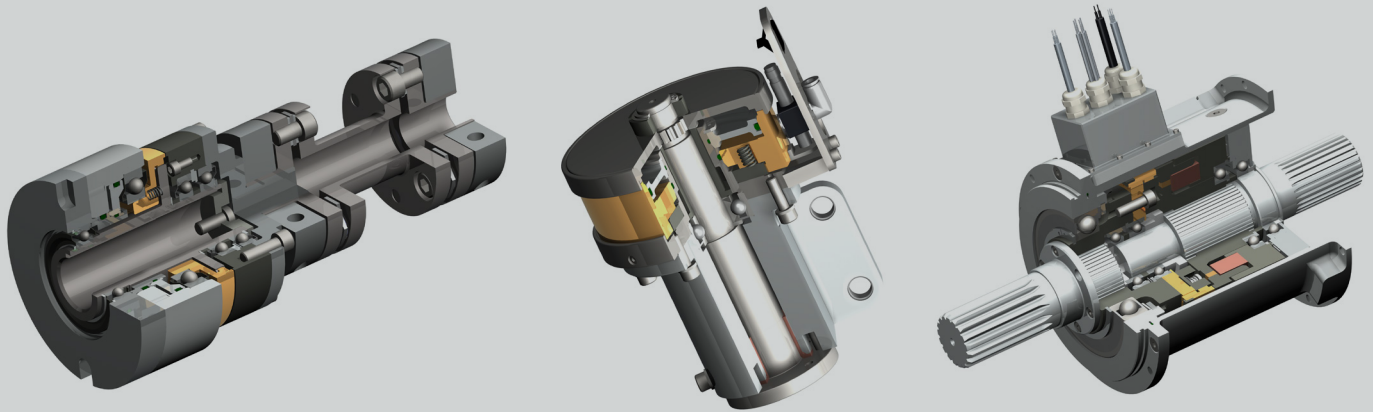

In many cases, a combination of different drive elements is needed to solve the applications particular problems and difficulties. Being not just supplier but technological partner to our customers, our extensive engineering is part of extraordinary and challenging power transmission projects.

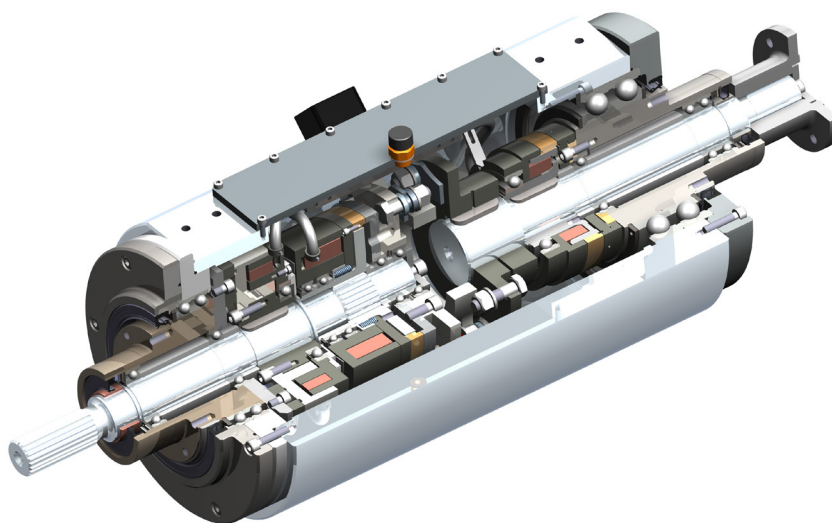

**Our product is the know-how,  
with hardware as an added bonus.**

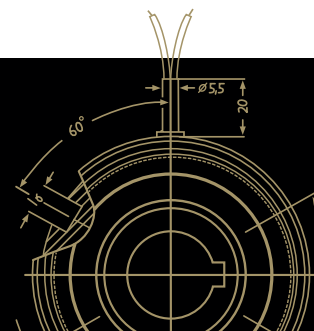

## Driven by excellence

### Why Mönninghoff

- intensive dialog with our customers' engineers
- decades of experience and competence
- deep understanding for all areas of mechanical engineering
- highly modern and flexible machine park
- enthusiasm for quality
- flexibility, inventiveness and communication skills of our employees
- commitment to Germany and Bochum as industrial location



Helps you find a customer-specific power transmission solution for extraordinary circumstances.



For the competent processing and smooth handling of your orders and delivery dates.



Feels committed to protect and preserve the high value of your machine and to secure its availability.



#### WA LOCATIONS

Unit 1 / 45 Inspiration Drive, Wangara WA 6065  
(08) 9303 4966

Unit 16 / 51-53 Kewdale Road, Welshpool WA 6106  
(08) 6314 1155

support@chainanddrives.com.au

#### NSW LOCATION

Unit 7 / 70 Holbeche Road, Arndell Park NSW 2148  
(02) 9674 8611

salesnsw@chainanddrives.com.au



A Mechanical Equipment Group Company