


Steel Disc Couplings

RINGFEDER® TND XDX

Hubs with RINGFEDER® Shrink Discs, Double-Jointed, with Spacer,
Shaft-Hub Connection by Shrink Disc

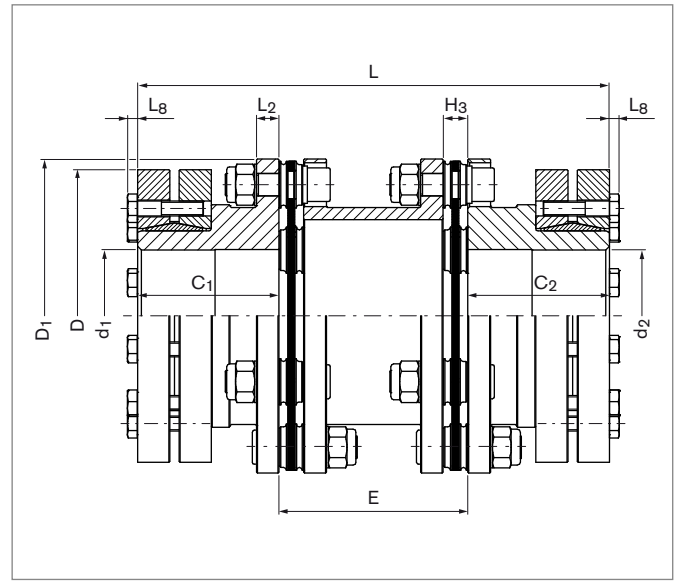

Size	T _{KNHD} ¹⁾	T _{KNHT} ¹⁾	n _{max} ²⁾	d ₁ ; d ₂ ³⁾ min	d ₁ ; d ₂ ³⁾ max	C ₁ / C ₂	E ⁵⁾	H ₃	D ₁	L ₂	L	n _{Sc}	L ₈
XDX	Nm	Nm	1/min	mm	mm	mm	mm	mm	mm	mm	mm	Quantity	mm
82	750	1050	3600	38	60	55	100	10,5	116	10	210	6	4
							140				250		
							180				290		
98	1350	1750	3600	50	70	60	100	12	140,5	11	220	6	5,3
							140				260		
							180				300		
118	2400	3000	3600	50	75	75	100	13	166,5	12	250	6	5,3
							140				290		
							180				330		
141	4000	5200	3400	65	95	90	140	15	198,5	14	320	6	7,5
							180				360		
							250				500		
169	6500	8500	3000	65	105	125	140	21	238	16	390	6	10
							180				430		
							250				500		
205	21000	26000	2500	95	145	160	200	28	295	22	520	8	10
							250				570		
							300				700		
254	36000	44000	2100	94	160	200	224	32,5	345	26	624	8	10
							250				650		
							300				700		

To continue see next page

Steel Disc Couplings RINGFEDER® TND XDX

Size	E ⁵⁾	Gw _{sp}	Max. Permissible Misalignment ⁷⁾							
			C _{Tdyn} HD	C _{Tdyn} HT	axial		angular		radial	
XDX	mm	kg	10 ⁶ Nm/rad	10 ⁶ Nm/rad	ΔK _a HD	ΔK _a HT	ΔK _w HD	ΔK _w HT	ΔK _r HD	ΔK _r HT
					mm	mm	Degrees	Degrees	mm	mm
82	100	1,991	0,271	0,308					1,4	1,1
	140	2,289	0,246	0,277	1,4	0,8	2	1,4	2,1	1,5
	180	2,586	0,226	0,251					2,8	2,1
	Δ per 100 mm	0,74		1,06						
98	100	3,188	0,513	0,543					1,5	1
	140	3,627	0,469	0,494	2	1,2	2	1,4	2,1	1,5
	180	4,066	0,433	0,454					2,8	2
	Δ per 100 mm	1,09		2,18						
118	100	4,874	0,914	0,948					1,4	1
	140	5,574	0,855	0,884	2,4	1,6	2	1,4	2,1	1,5
	180	6,275	0,803	0,829					2,8	2
	Δ per 100 mm	1,74		5,24						
141	140	7,944	1,306	1,362					2	1,5
	180	8,718	1,229	1,279	2,8	1,6	2	1,4	2,7	2
	Δ per 100 mm	1,92		8,3						
169	140	14,179	2,467	3,035					2	1,4
	180	15,757	2,375	2,898	3	2,4	2	1,4	2,6	1,9
	250	18,520	2,231	2,686					3,8	2,7
	Δ per 100 mm	3,92		25,36						
205	200	32,689	8,995	9,142					1,4	1,2
	250	35,489	8,265	8,389	2,2	1,2	1	0,8	1,8	1,5
	Δ per 100 mm	5,56		50,3						
254	224	54,420	14,975	15,19					1,6	1,3
	250	56,404	14,302	14,497	2,2	1,6	1	0,8	1,8	1,5
	300	60,22	13,163	13,328						1,8
	Δ per 100 mm	7,58		81,63						

1) When selecting the coupling size, it is essential to observe the instructions on coupling dimensioning in the document "Product Paper & Tech Paper RINGFEDER® Steel Disc Couplings". Short-term peak torque T_{kmax} is limited to 1.75 multiples of T_{KN} or by the transmissible torque T of the shrink disc.

2) For longer spacers, check bending critical rotational speed.

3) Bore tolerance H6 up to diameter 80 mm; Bore tolerance H7 from diameter 80 mm.


5) Longer spacers on request. The figures given at "Δ per 100 mm" for Gw_{sp}, C_{Tdyn}HD and C_{Tdyn}HT are approximate values.

7) The maximum misalignment values must not apply simultaneously. The instructions on coupling dimensioning in the document "Product Paper & Tech Paper RINGFEDER® Steel Disc Couplings" are to be observed.

To continue see next page

Steel Disc Couplings RINGFEDER® TND XDX

Shaft-Hub Connection by Shrink Discs RINGFEDER® RfN 4061

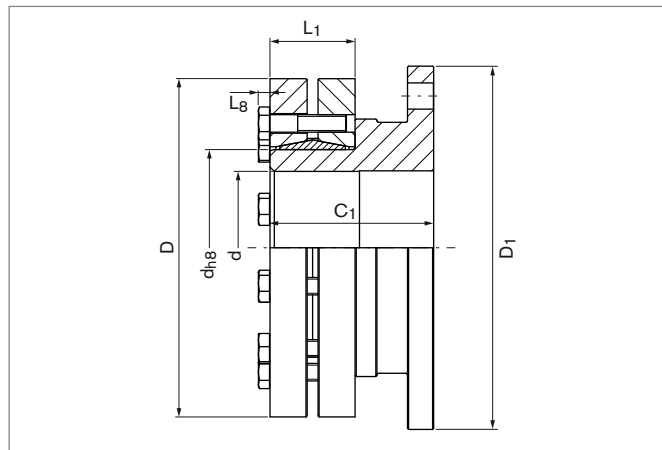

Shrink Discs RINGFEDER® RfN 4061						Sizing RINGFEDER® TND XDX						
d _{h8}	x	D	L ₁	L ₈	d	T	Size	D ₁	C ₁ / C ₂	T _{KNHD} ¹⁾	T _{KNHT} ¹⁾	n _{max}
mm			mm	mm	mm	Nm	XDX	mm	mm	Nm	Nm	1/min
50	x	90	27,5	4	38	1350	82	116	55	750	1050	3600
					40	1500						
					42	1700						
55	x	100	30,5	4	42	1300	82	116	55	750	1050	3600
					45	1550						
68	x	115	30,5	4	48	1800	82	116	55	750	1050	3600
					55	1700						
					60	2250						
75	x	138	32,5	5,3	60	2850	118	166,5	75	2400	3000	3600
					65	4050						
					70	4600						
80	x	145	32,5	5,3	65	3900	98	140,5	60	1350	1750	3600
					70	4800						
					75	6050						
90	x	155	39	5,5	75	7300	169	238	125	6500	8500	3000
					90	12100						
					95	14050						
115	x	185	56	6,4	95	15100	169	238	125	6500	8500	3000
					100	17550						
					105	20000						
140	x	230	60,5	7,5	105	25000	205	295	160	21000	26000	2500
					120	35500						
					125	39400						
165	x	290	71	10	125	43500	205	295	160	21000	26000	2500
					140	57350						
					145	62400						
185	x	330	86,4	10	145	69000	254	345	200	36000	44000	2100
					155	81000						
					160	87200						
200	x	350	86	10	160		254	345	200	36000	44000	2100

The transmissible torque of the coupling is dependent on the selected disc pack as well as the type of the shaft-hub connection. The lower torque limits the transmissibility and must be taken as a basis for the selection of the coupling.

To continue see next page

Steel Disc Couplings RINGFEDER® TND XDX

Explanations

T_{KNHD} = Nom. transmissible torque with disc pack HD	L_2 = Hub flange thickness	ΔK_{wHT} = Max. permissible angular misalignment with disc pack HT
T_{KNHT} = Nom. transmissible torque with disc pack HT	L = Total length	ΔK_rHD = Max. permissible radial misalignment with disc pack HD
n_{max} = Max. rotational speed	n_{Sc} = Quantity of screws	ΔK_rHT = Max. permissible radial misalignment with disc pack HT
d_{1min} = Min. bore diameter d_1	L_8 = Overhang length	
d_{2min} = Min. bore diameter d_2	GW_{sp} = Weight of spacer	
d_{1max} = Max. bore diameter d_1	GW_{hs} = Weight of hub including shrink disc	
d_{2max} = Max. bore diameter d_2	C_{TdynHD} = Dynamic torsional stiffness with disc pack HD	Shrink Disc Selection
C_1 = Guided length in hub bore	C_{TdynHT} = Dynamic torsional stiffness with disc pack HT	d_{hs} = Inner diameter
C_2 = Guided length in hub bore	ΔK_aHD = Max. permissible axial misalignment with disc pack HD	D = Outer diameter
E = Distance between hubs	ΔK_aHT = Max. permissible axial misalignment with disc pack HT	L_1 = Min. installation length (without screws)
H_3 = Width of the disc pack	ΔK_wHD = Max. permissible angular misalignment with disc pack HD	L_8 = Overhang length
D_1 = Max. outer diameter		d = Solid shaft diameter
		T = Transmissible torque

Ordering example

Type	Size	Disc pack	Distance between hubs E	Bore diameter d_1	Shrink Disc RfN 4061 for bore diameter d_1	Bore diameter d_2	Shrink Disc RfN 4061 for bore diameter d_2
TND XDX	98	HD	100	50	68 x 115	60	68 x 115

Further information on RINGFEDER® TND XDX

Technical Information

- The specified values for transmissible torques are valid as follows: Shaft tolerance h6 for shaft diameters up to 50 mm; Shaft tolerance g6 for shaft diameters from 50 mm; Surface quality $R_a \leq 3.2 \mu m$.
- From a peripheral speed of 30 m/s, separate balancing of the individual coupling parts is recommended.
- Without further instructions on balancing, the coupling parts are balanced individually according to DIN 21940-11 in quality G 6,3 at 1,500 1/min. The hubs and the spacer are balanced without screwed-on disc packs.

DISTRIBUTED BY



chainanddrives.com.au
support@chainanddrives.com.au

Disclaimer of liability

All technical details and notes are non-binding and cannot be used as a basis for legal claims. The user is obligated to determine whether the represented products meet his requirements. We reserve the right to carry out modifications at any time in the interests of technical progress.